




FLORENZA GRANITO PVT LTD.

8-A National Highway, Sartanpar Road,
Ratavirda, Wakaner, Gujrat (363621).

info@kremen.in
www.kremen.in

Customer Care: +91 75758 00103

FULLBODY COLLECTION

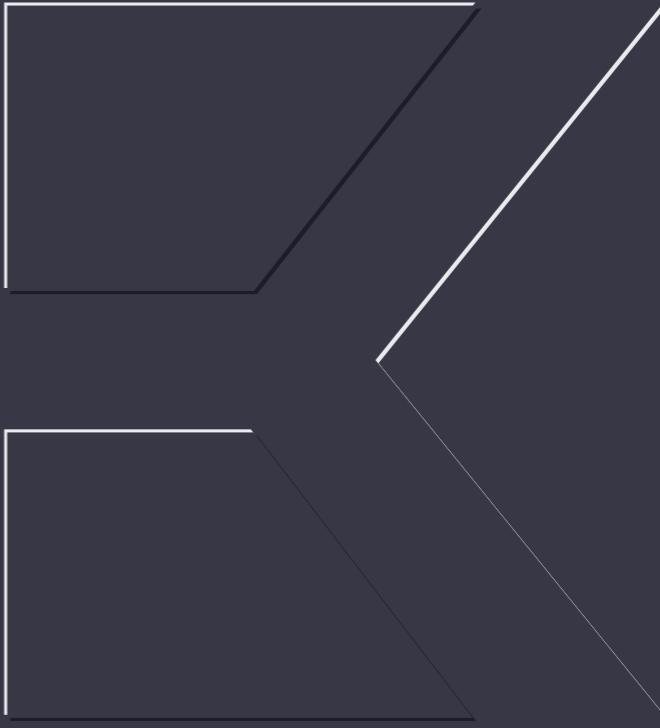

12 MM HAMMER
SERIES



FULLBODY

COLLECTION

Incepted in the year 2016, Fiorenza Granito Pvt. Ltd. entered the tile industry with brand name "**KREMEN**". **KREMEN** has come with a fresh, innovative and positive outlook towards exploring better ways to fulfill the architectural requirements of todays interior design concepts.

The plant is equipped with a state-of-the-art, highly advanced manufacturing facility. Made from quality-certified raw materials using innovative and modern technology, the tiles are a perfect blend of modern design, aesthetics, and lasting strength. **KREMEN** vitrified tile design concepts are unique and truly architectural. **KREMEN** offers complete tiling solutions across a wide product profile and diverse architectural needs.

KREMEN Vitrified Tiles has established itself as a leader in innovation and design in the export market. **KREMEN** Vitrified Tiles vows to continue excelling in exports with the best quality vitrified tiles. **KREMEN** Vitrified Tiles are exported to Europe, the Middle East, Asia, and Africa.

FULL BODY FULL IMPACT

Bringing your dream space to life

EXPLORE THE EXQUISITE FINISHES

Which brings life to spaces

Our Fullbody Collection features three distinct and thoughtfully curated finishes — Polished, Matt, and Rustic Punch each designed to revamp your spaces with character and sophistication.

Whether you are looking for a tactile experience, a subtle feel, or shiny elegance, our finishes are ready to bring your vision to life. They are designed to complement your everyday routine and still effortlessly provide lasting performance. Upgrade to refined aesthetics with these finishes that are a style statement.





REDEFINING SPACES

with aesthetics & functionality

Stay worry-free with our collection, designed to deliver unmatched style and long-lasting performance. Resistant to all weather extremes, these tiles keep both your indoor and outdoor spaces strong, stunning, and low-maintenance, year after year. Built to endure the harshest conditions, they offer exceptional performance because of their durable construction. The fullbody composition guarantees a lasting impression without compromising on elegance.

COLOR PALETTE GUIDE

for every style

600x600mm (8mm Thickness)

Dark color




Light color




Sophisticated in design and strong in structure, our laminates blend modern elegance with long-lasting durability. Crafted with advanced technology and premium materials, each surface delivers a flawless finish that elevates spaces effortlessly.

12MM SERIES

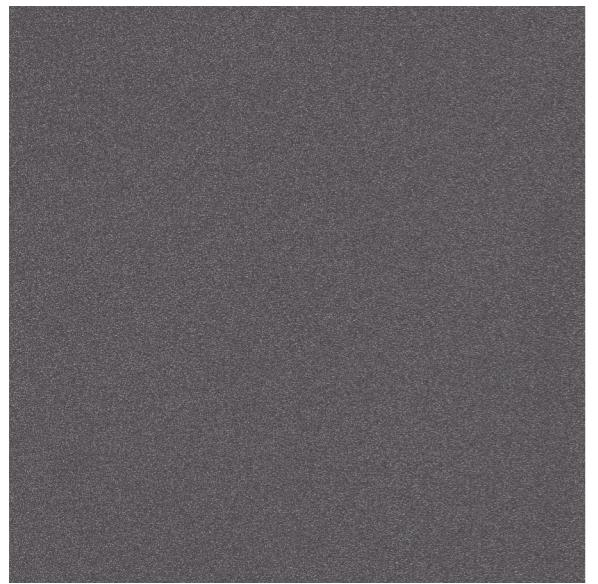

HAMMER S&P BLACK

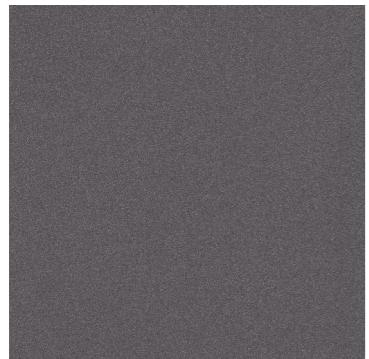

S&P BLACK(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces





Minimum
4mm Spacer
Recommended



12MM SERIES

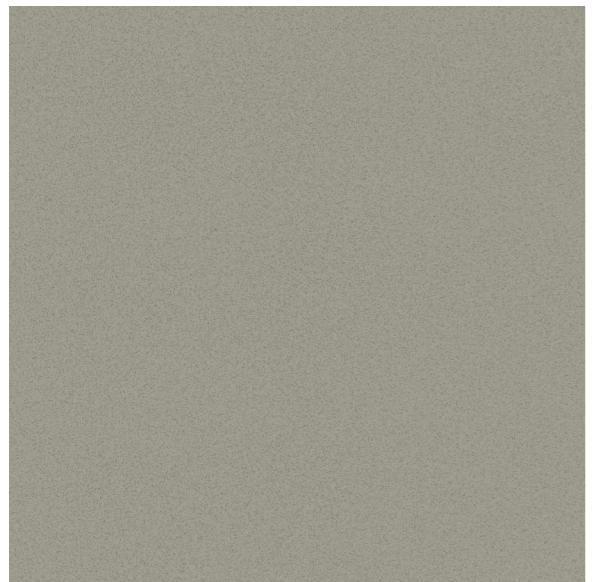

HAMMER S&P KOTA

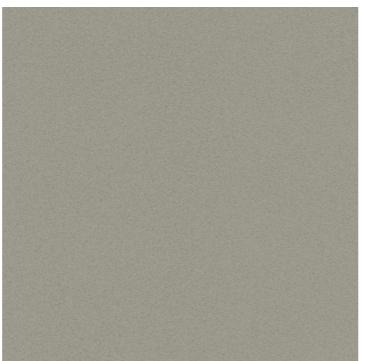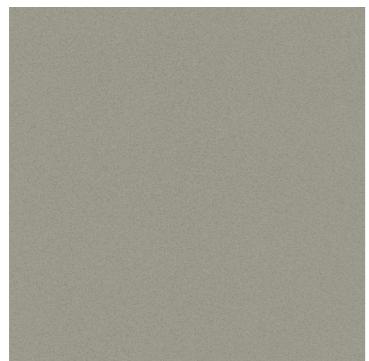

S&P KOTA(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces





Minimum
4mm Spacer
Recommended



12MM SERIES

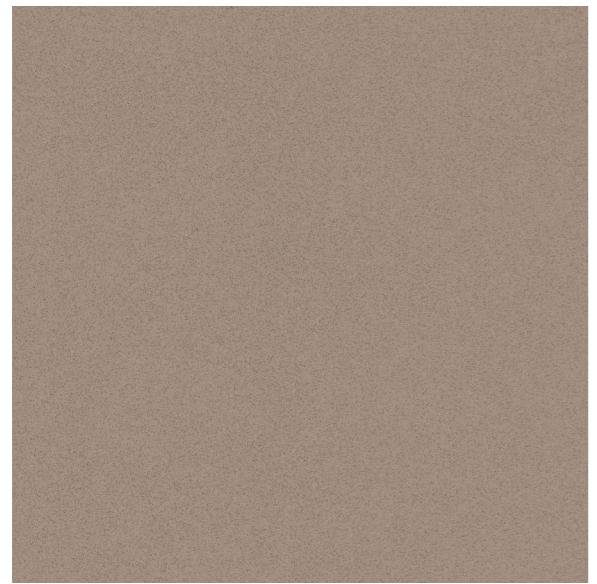

HAMMER S&P ORANGE

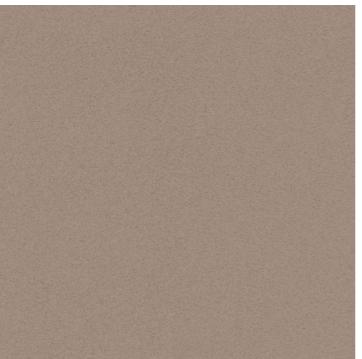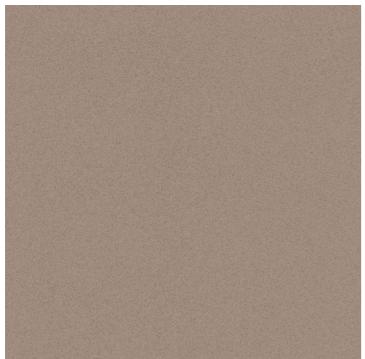

S&P ORANGE(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES

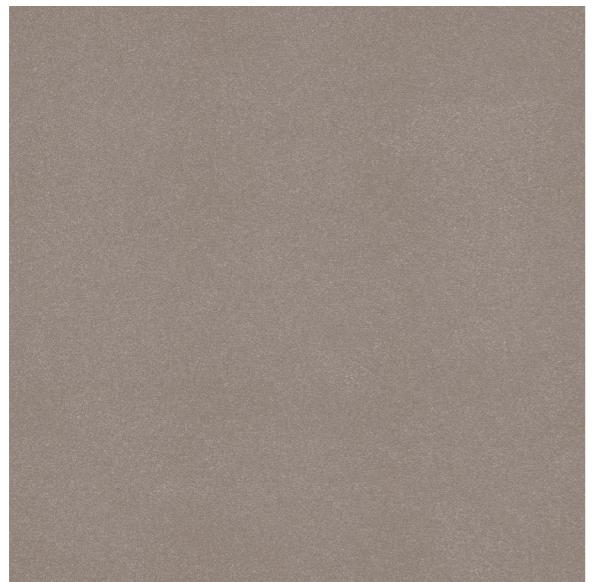

HAMMER S&P EARTH

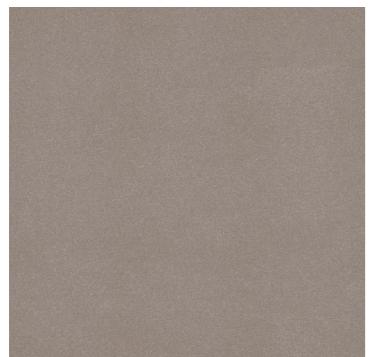

S&P EARTH(Matt)

Applicable on
Wall / Floor

Available Finishes
Hammer, Stone Surfaces



Minimum
4mm Spacer
Recommended



12MM SERIES



HAMMER S&P WHITE



S&P WHITE(Matt)

Applicable on
Wall / Floor

Available Finishes
Hammer, Stone Surfaces



Minimum
4mm Spacer
Recommended



12MM SERIES



HAMMER S&P GREY



S&P GREY(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES

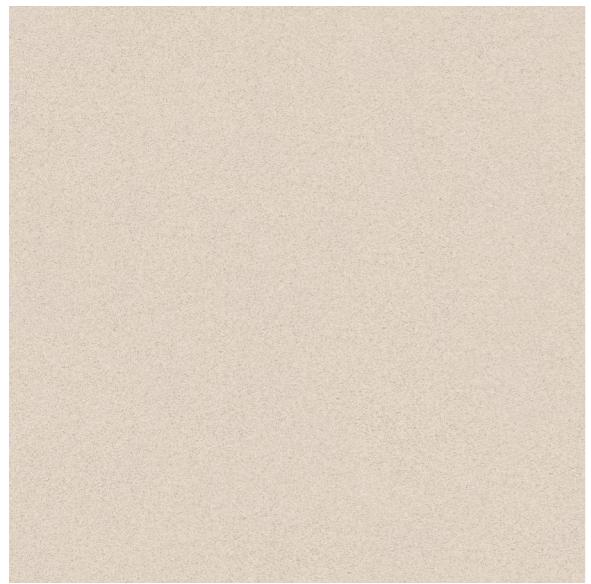

HAMMER S&P CREMA

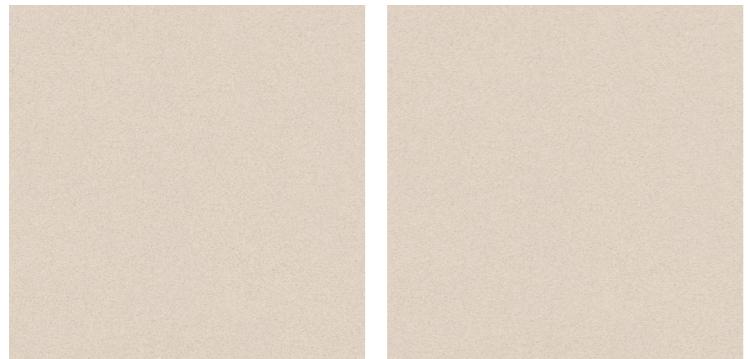

S&P CREMA(Matt)

Applicable on
Wall / Floor

Available Finishes
Hammer, Stone Surfaces



12MM SERIES



HAMMER S&P BEIGE



S&P BEIGE(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES

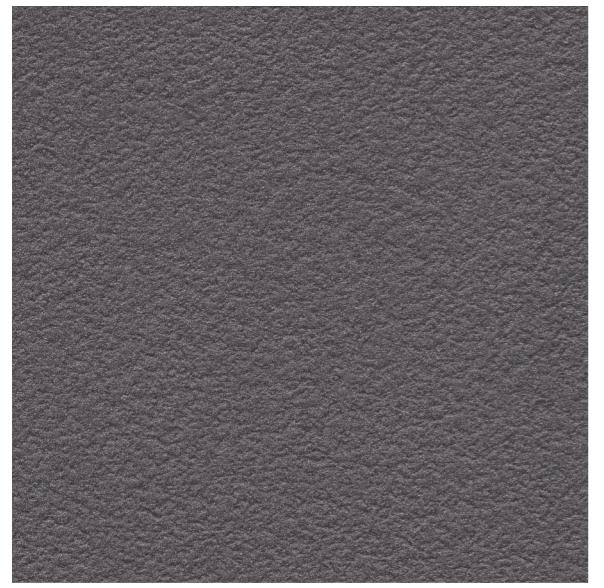

STONE S&P BLACK

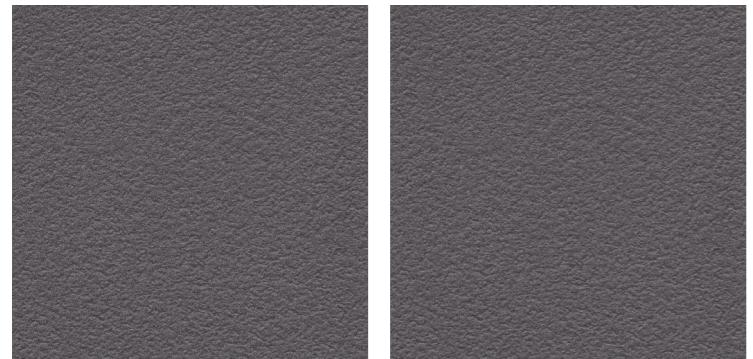


S&P BLACK(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended

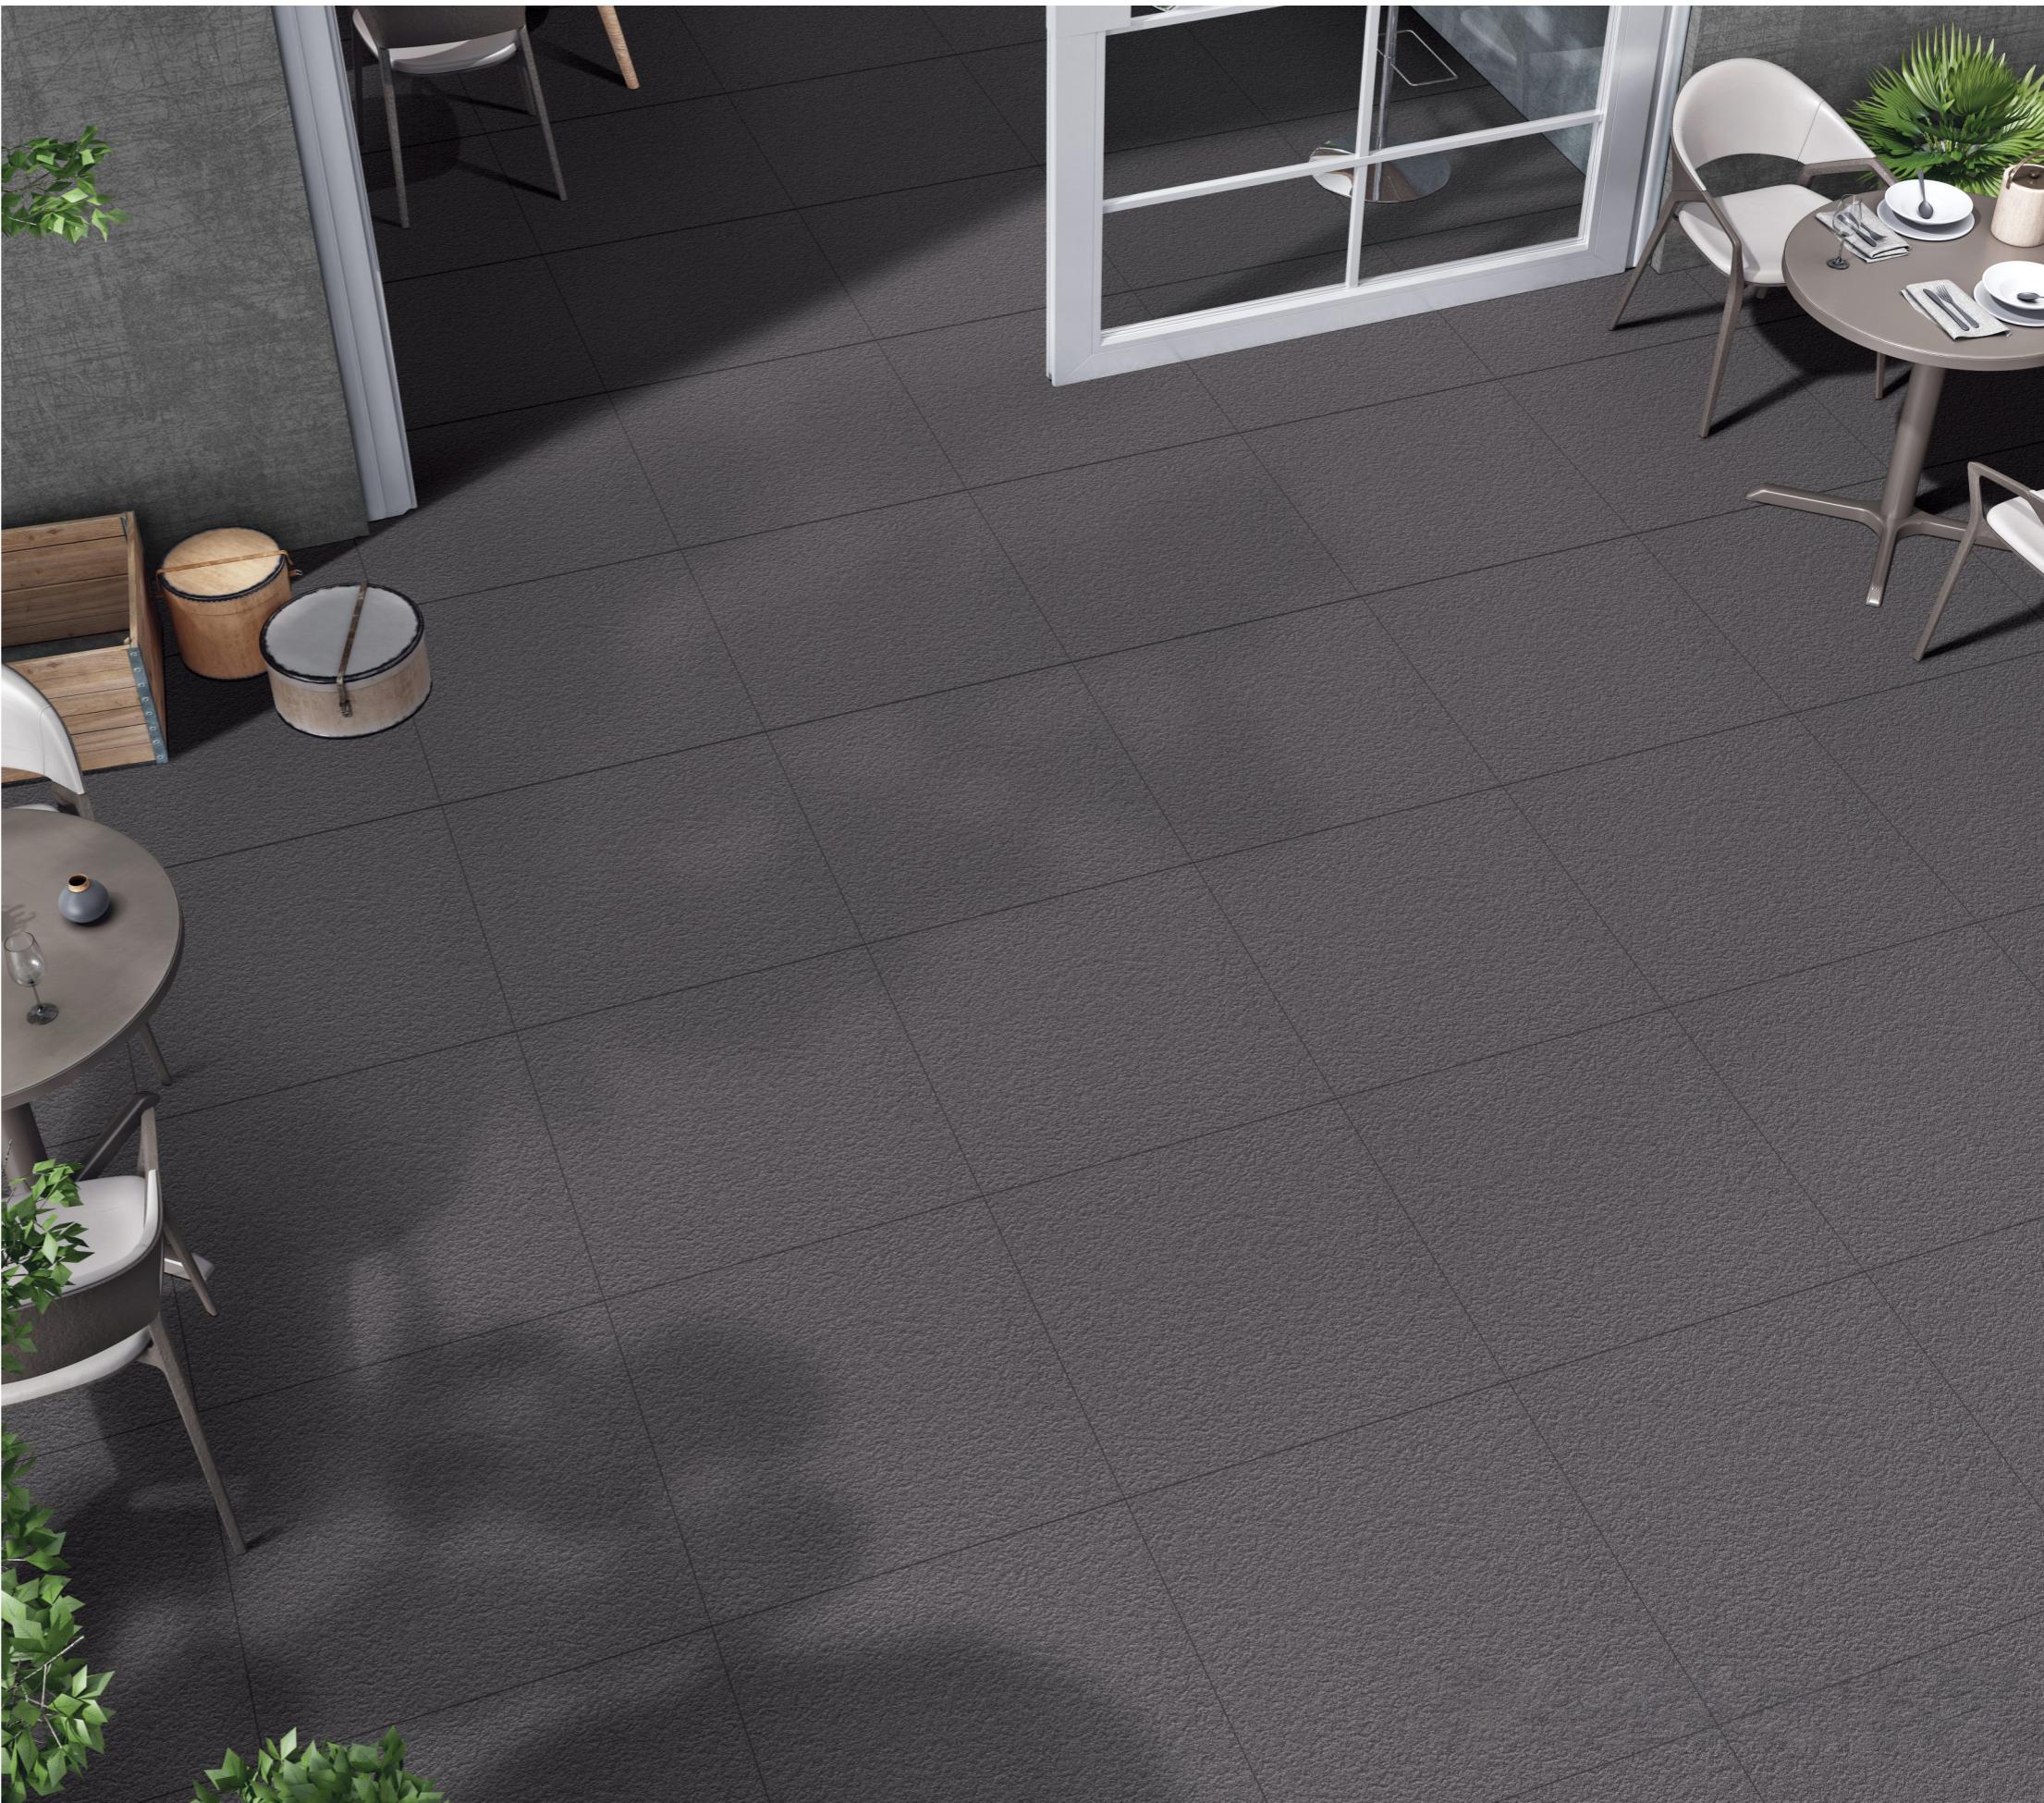

12MM SERIES

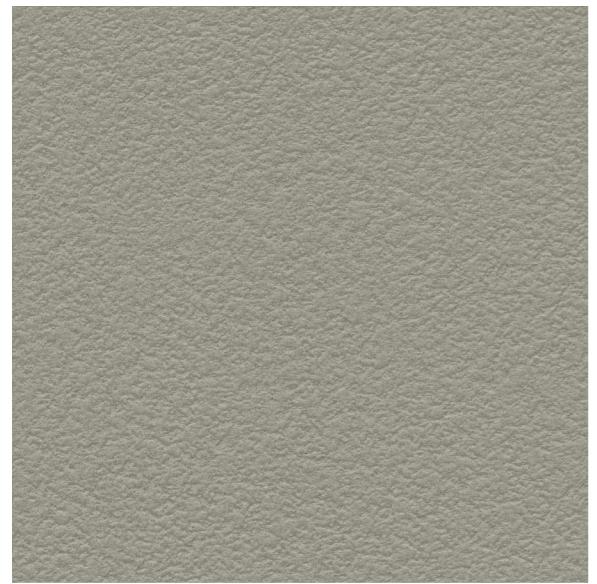

STONE S&P KOTA

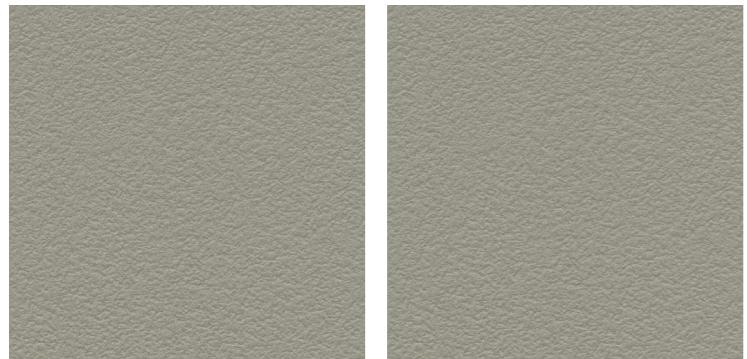

S&P KOTA(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES

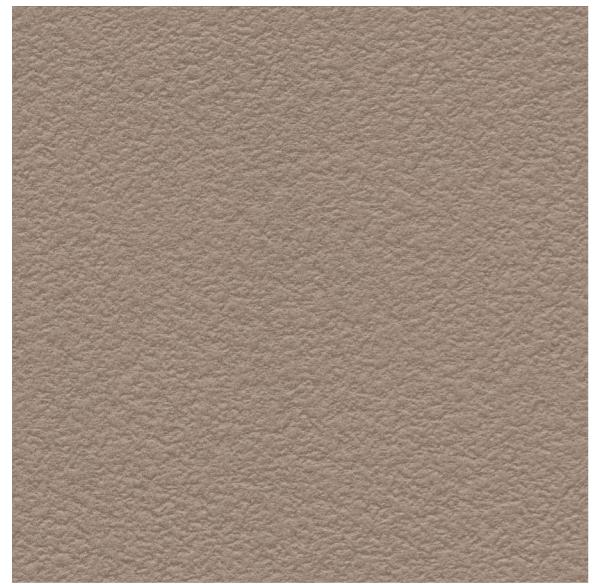

STONE S&P ORANGE

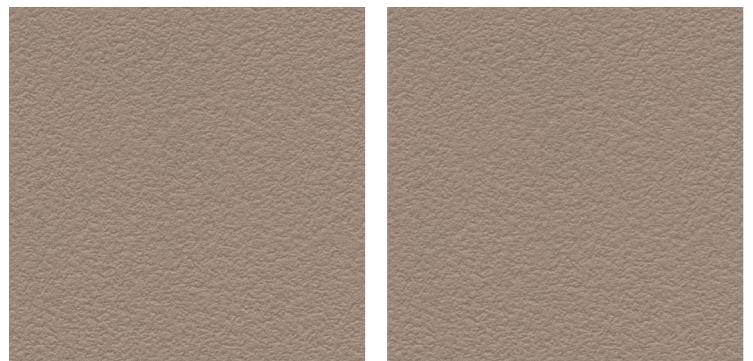

S&P ORANGE(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces



Minimum
4mm Spacer
Recommended



12MM SERIES

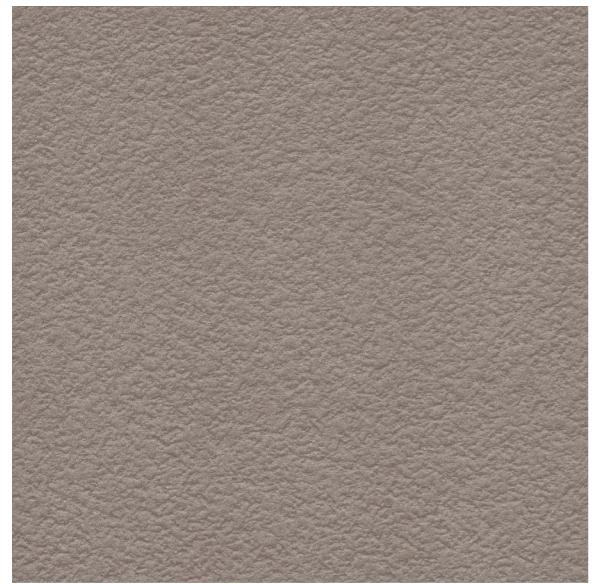

STONE S&P EARTH



S&P EARTH(Matt)



Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES

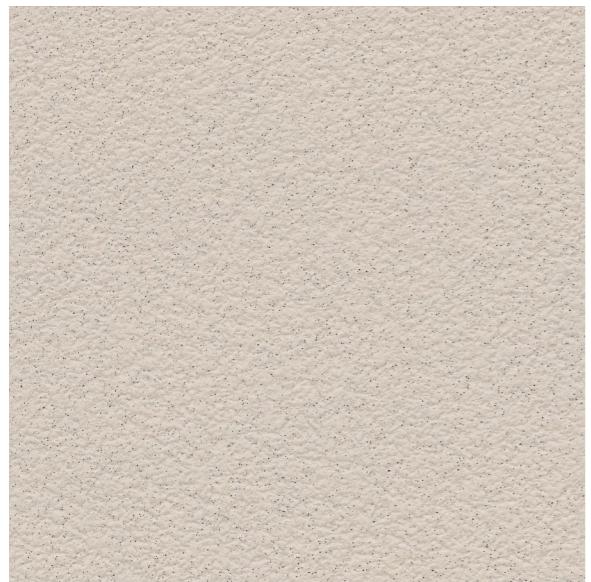

STONE S&P WHITE

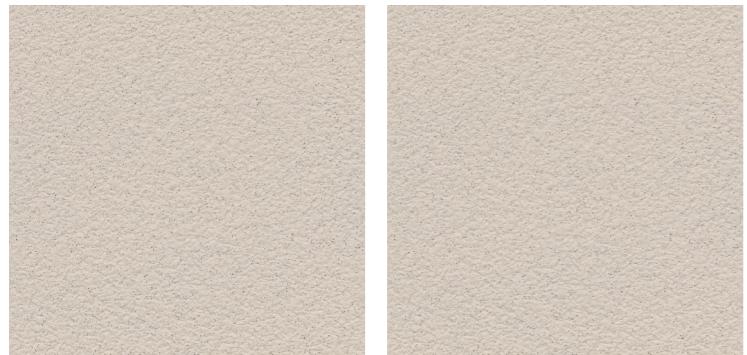

S&P WHITE(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES

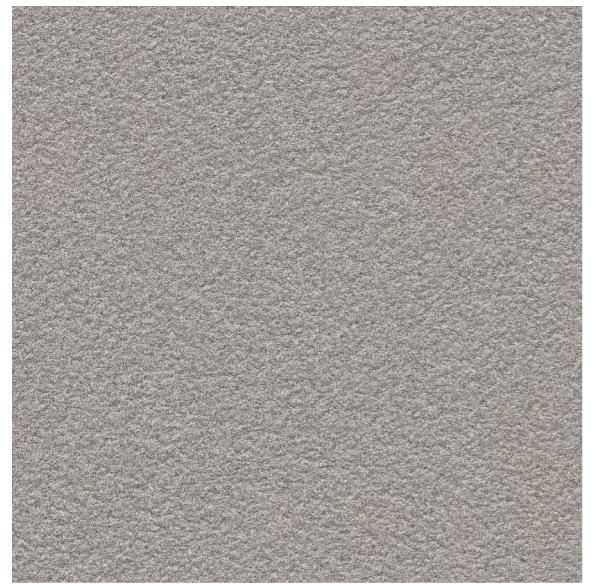

STONE S&P GREY

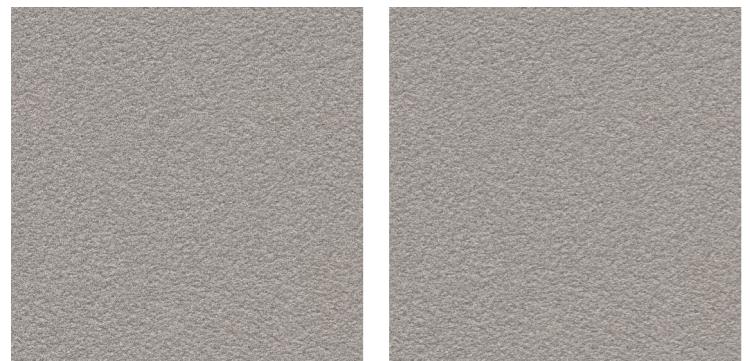

S&P GREY(Matt)

Applicable on
Wall / Floor


Available Finishes
Hammer, Stone Surfaces



Minimum
4mm Spacer
Recommended



12MM SERIES

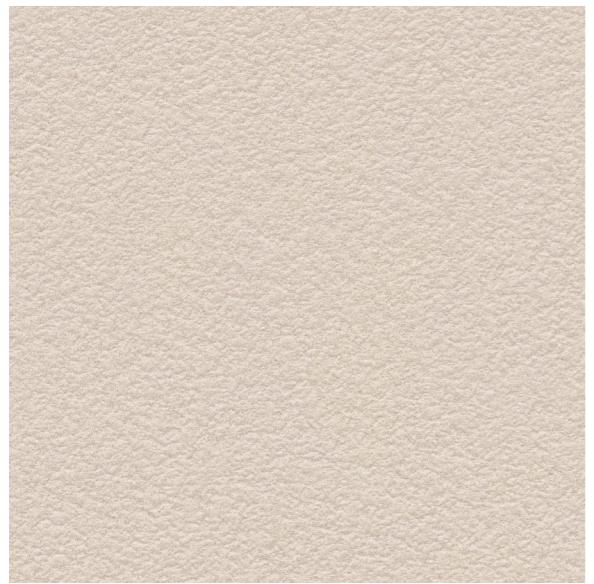

STONE S&P CREMA



S&P CREMA(Matt)

Applicable on
Wall / Floor

Available Finishes
Hammer, Stone Surfaces




Minimum
4mm Spacer
Recommended



12MM SERIES



STONE S&P BEIGE

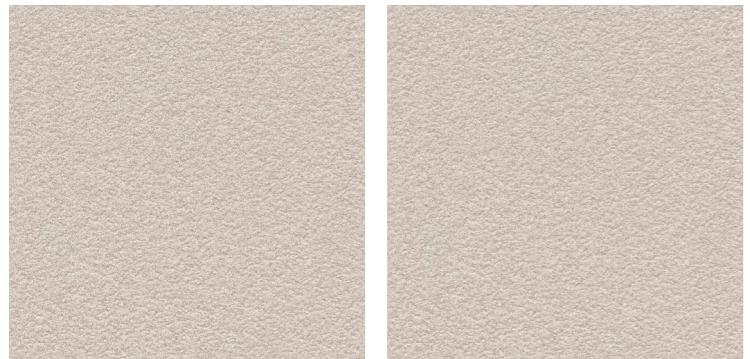


S&P BEIGE(Matt)

Applicable on
Wall / Floor

Available Finishes
Hammer, Stone Surfaces



Minimum
4mm Spacer
Recommended

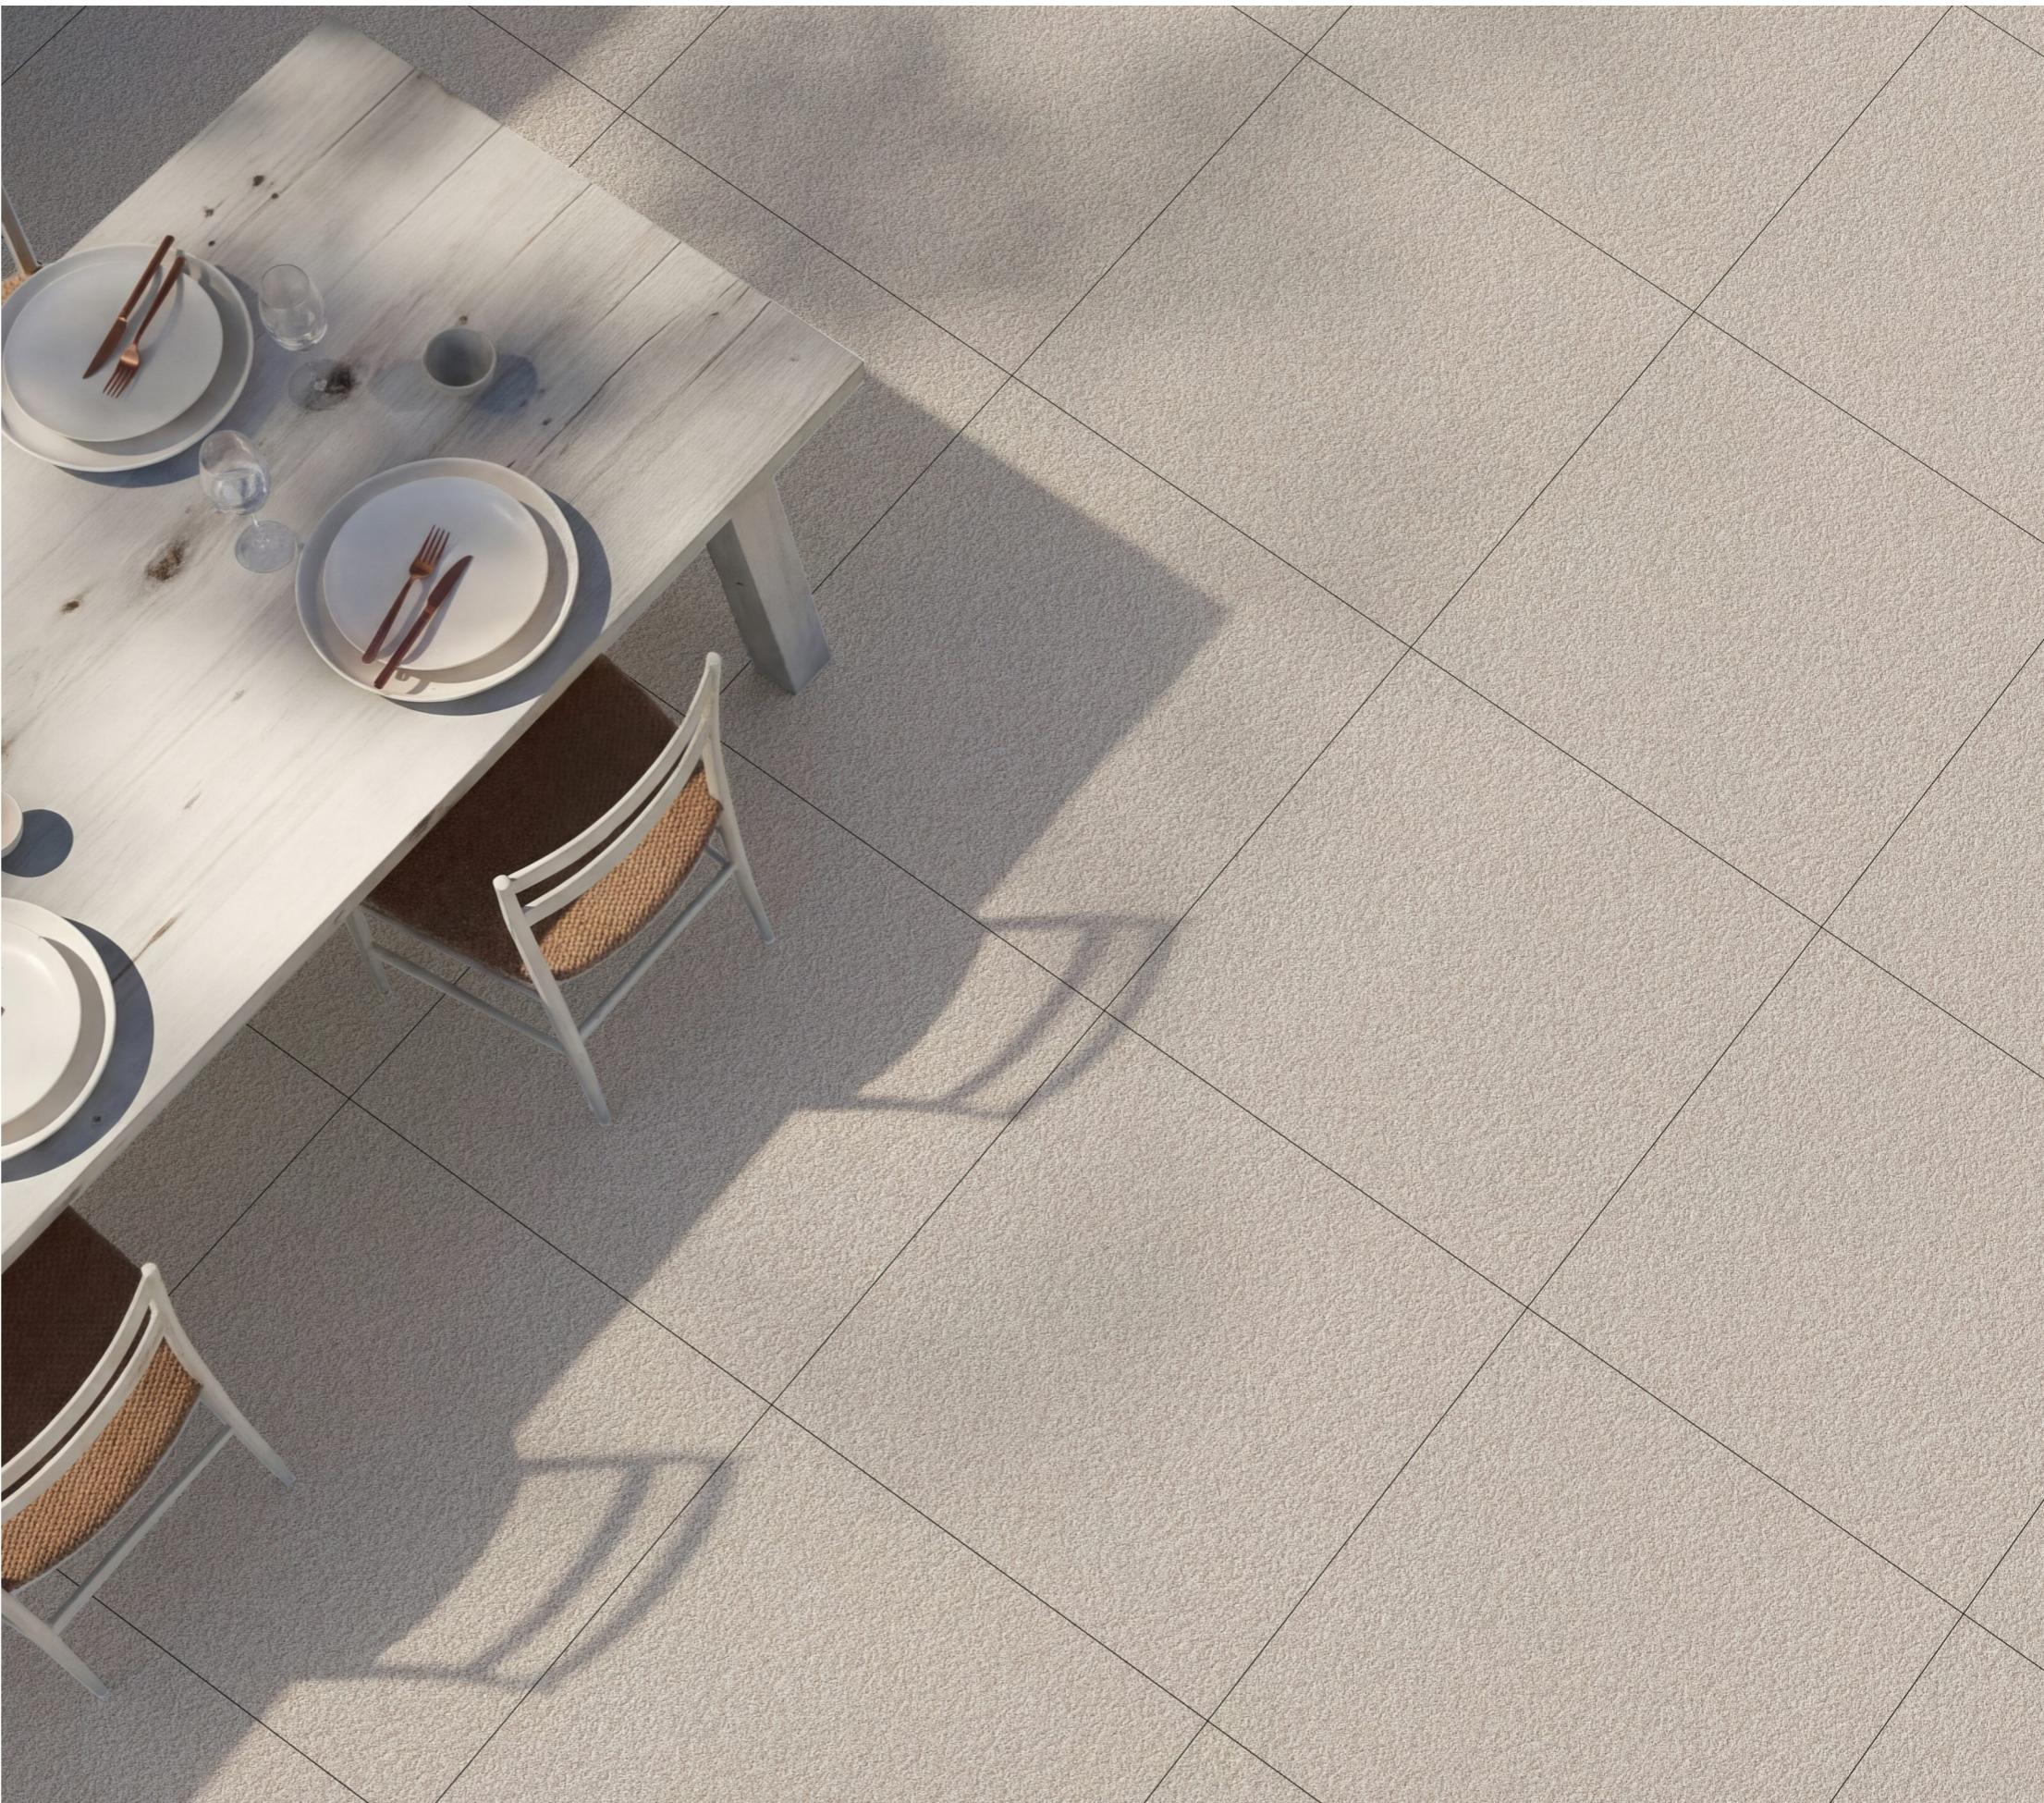

TECHNICAL SPECIFICATIONS

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP B1a	MEAN VALUE OF FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Mohs Hardness	Min. 6	≤ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance (Friction Co-efficient)	> 0.40	> 0.40	ISO-10545-17



PACKING DETAILS

SIZES	THICKNESS	PIECES / BOX	WEIGHT / BOX (Approx)	COVERAGE AREA / BOX
600x1200mm	8 mm	2 Pieces	27.00 kg	15.5 ft ² or 1.44 mtr ²
600x600mm	8 mm	4 Pieces	25.50 kg	15.5 ft ² or 1.44 mtr ²
600x600mm	12 mm	3 Pieces	28.00 kg	11.63 ft ² or 1.00 mtr ²