




**FLORENZA GRANITO PVT LTD.**

**8-A National Highway, Sartanpar Road,  
Ratavirda, Wakaner, Gujrat (363621).**

[info@kremen.in](mailto:info@kremen.in)  
[www.kremen.in](http://www.kremen.in)

**Customer Care: +91 75758 00103**

FULLBODY COLLECTION

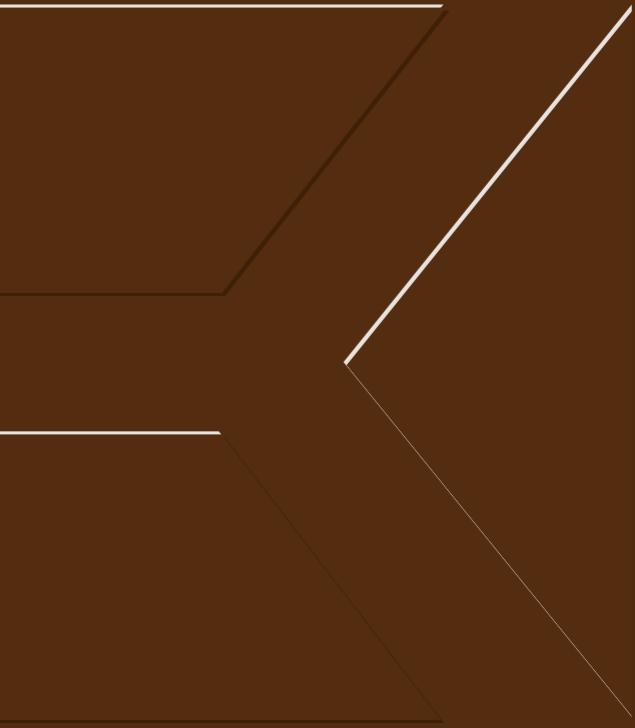

**DUSKY SERIES/ PLAIN  
SERIES (600x1200)MM**



# FULLBODY

COLLECTION

Incepted in the year 2016, Fiorenza Granito Pvt. Ltd. entered the tile industry with brand name "**KREMEN**". **KREMEN** has come with a fresh, innovative and positive outlook towards exploring better ways to fulfill the architectural requirements of todays interior design concepts.

The plant is equipped with a state-of-the-art, highly advanced manufacturing facility. Made from quality-certified raw materials using innovative and modern technology, the tiles are a perfect blend of modern design, aesthetics, and lasting strength. **KREMEN** vitrified tile design concepts are unique and truly architectural. **KREMEN** offers complete tiling solutions across a wide product profile and diverse architectural needs.

**KREMEN** Vitrified Tiles has established itself as a leader in innovation and design in the export market. **KREMEN** Vitrified Tiles vows to continue excelling in exports with the best quality vitrified tiles. **KREMEN** Vitrified Tiles are exported to Europe, the Middle East, Asia, and Africa.

# FULL BODY FULL IMPACT

Bringing your dream space to life

# EXPLORE THE EXQUISITE FINISHES

Which brings life to spaces

Our Fullbody Collection features three distinct and thoughtfully curated finishes — Polished, Matt, and Rustic Punch each designed to revamp your spaces with character and sophistication.

Whether you are looking for a tactile experience, a subtle feel, or shiny elegance, our finishes are ready to bring your vision to life. They are designed to complement your everyday routine and still effortlessly provide lasting performance. Upgrade to refined aesthetics with these finishes that are a style statement.





## REDEFINING SPACES

with aesthetics & functionality

Stay worry-free with our collection, designed to deliver unmatched style and long-lasting performance. Resistant to all weather extremes, these tiles keep both your indoor and outdoor spaces strong, stunning, and low-maintenance, year after year. Built to endure the harshest conditions, they offer exceptional performance because of their durable construction. The fullbody composition guarantees a lasting impression without compromising on elegance.

# COLOR PALETTE GUIDE

for every style

600x600mm (8mm Thickness)

Semi light color



Dark color



Light color



Plain color



# S

Subtle in appearance yet strong in character, our surfaces are made to complement evolving lifestyles. Designed to endure daily use while retaining their original charm, they embody timeless beauty backed by superior quality.


# PLAIN COLOR SERIES(600x1200)



CARBAN BLACK



CARBAN BLACK(Matt)

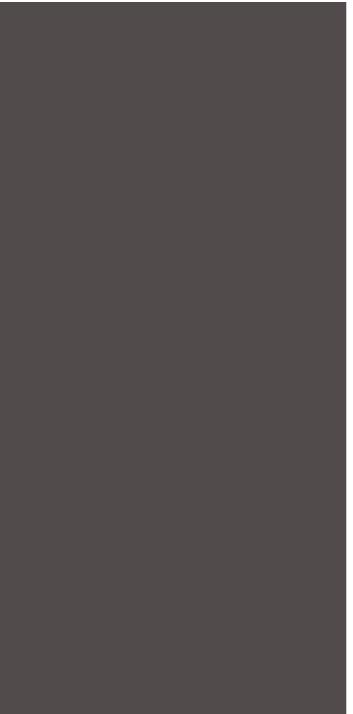

Applicable on  
Wall / Floor



Minimum  
4mm  
Spacer  
Recommended

Available Finish  
Matt



# PLAIN COLOR SERIES(600x1200)



OLIVE



OLIVE(Matt)



Applicable on  
Wall / Floor

Minimum  
4mm Spacer  
Recommended


Available Finish  
Matt



# PLAIN COLOR SERIES(600x1200)



DOVE

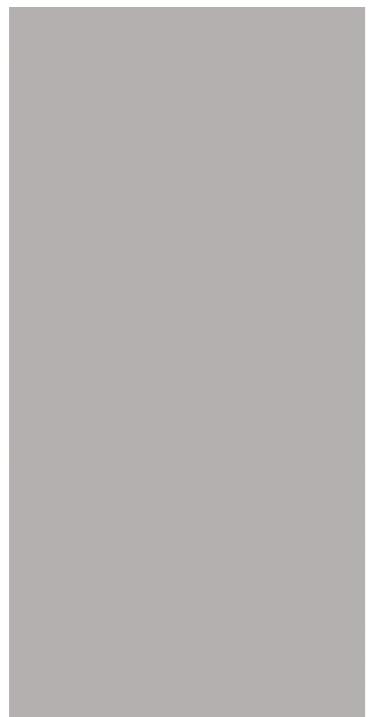

DOVE(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt



Minimum  
4mm Spacer  
Recommended



# PLAIN COLOR SERIES(600x1200)



DOMINO



DOMINO(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt



Minimum  
4mm  
Spacer  
Recommended



# PLAIN COLOR SERIES(600x1200)



PASTEL ORANGE



PASTEL ORANGE(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt




Minimum  
4mm Spacer  
Recommended



# PLAIN COLOR SERIES(600x1200)



MUSHROOM

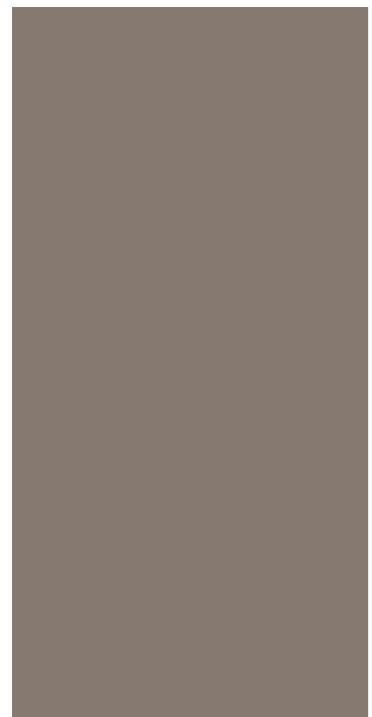

MUSHROOM(Matt)

Applicable on  
Wall / Floor


Available Finish  
Matt




Minimum  
4mm Spacer  
Recommended



# PLAIN COLOR SERIES(600x1200)

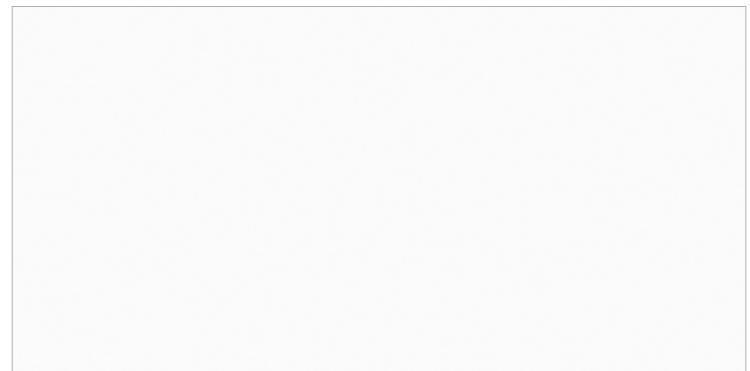

POLAR WHITE

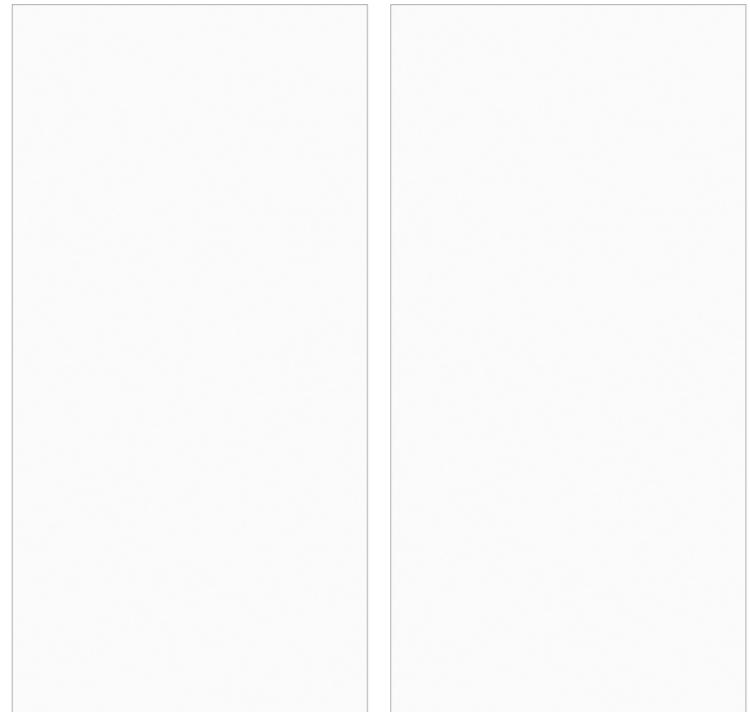

POLAR WHITE(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt




Minimum  
4mm Spacer  
Recommended



# PLAIN COLOR SERIES(600x1200)



MINT

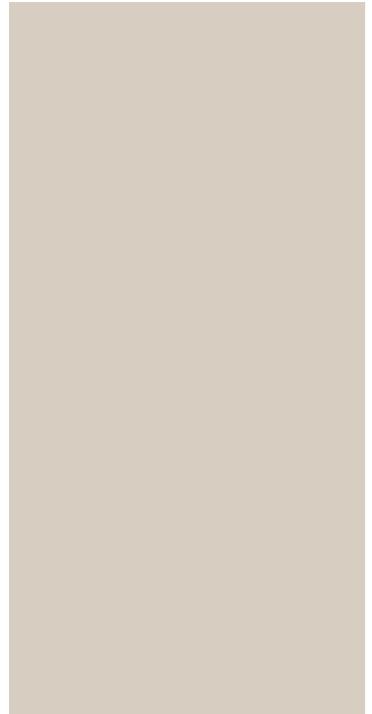

MINT(Matt)



MINT(Polish)




Applicable on  
Wall / Floor

Available Finishes  
Polished, Matt




Minimum  
4mm  
Spacer  
Recommended

# DUSKY SERIES(600x1200)

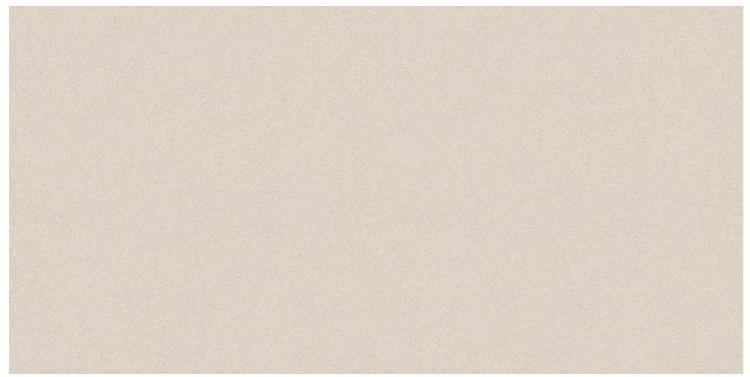

S&P CREMA

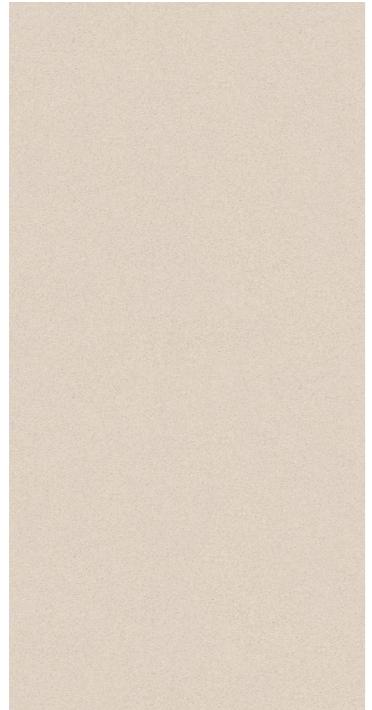

S&P CREMA(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt




Minimum  
4mm Spacer  
Recommended



# DUSKY SERIES(600x1200)



S&P BEIGE

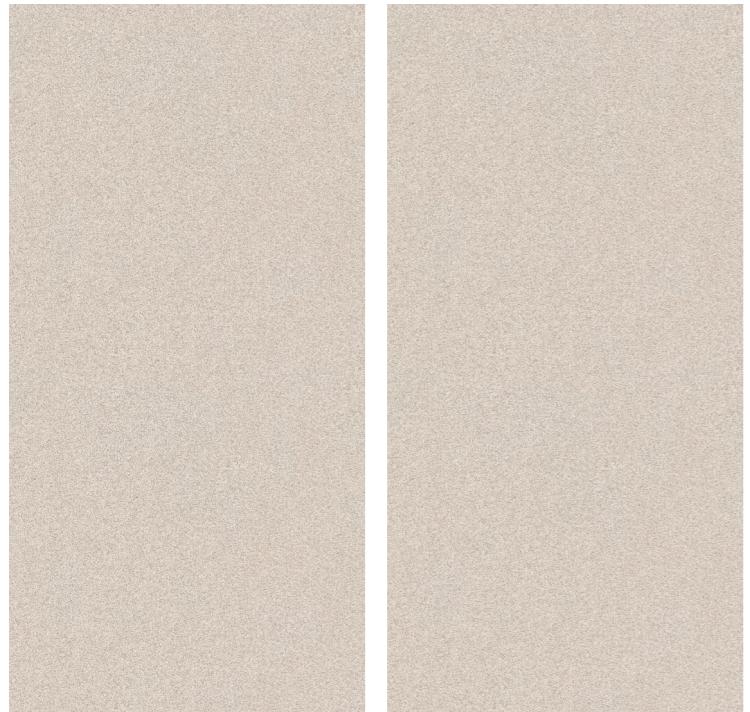

S&P BEIGE(Matt)

Applicable on  
Wall / Floor


Available Finish  
Matt




Minimum  
4mm Spacer  
Recommended



# DUSKY SERIES(600x1200)

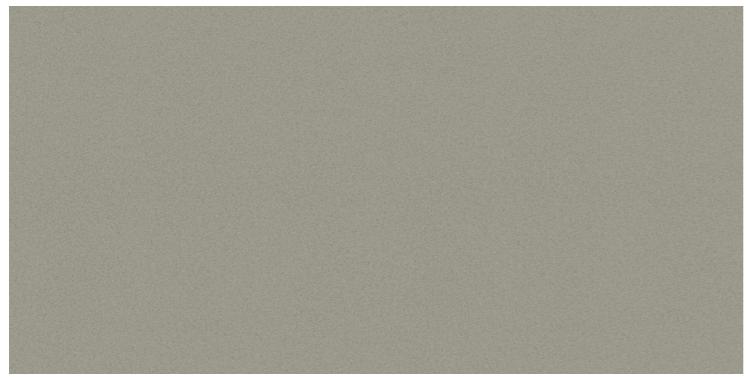

S&P KOTA

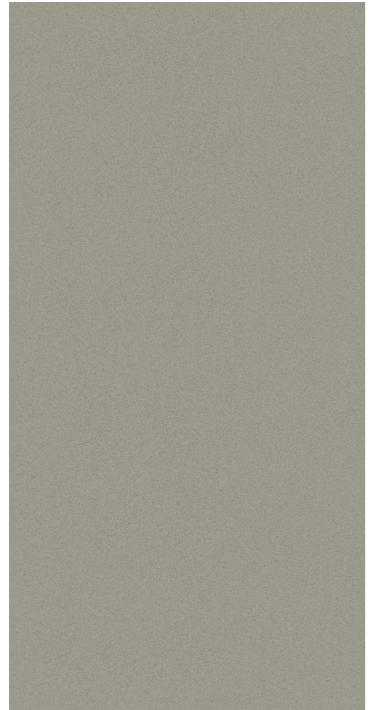

S&P KOTA(Matt)

Applicable on  
Wall / Floor




Minimum  
4mm  
Spacer  
Recommended


Available Finish  
Matt



# DUSKY SERIES(600x1200)

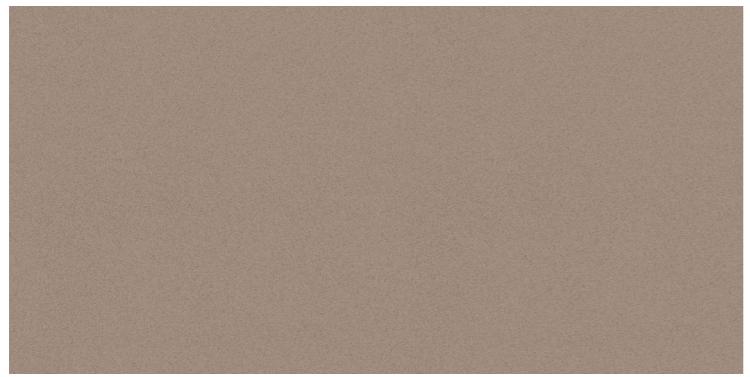

S&P ORANGE

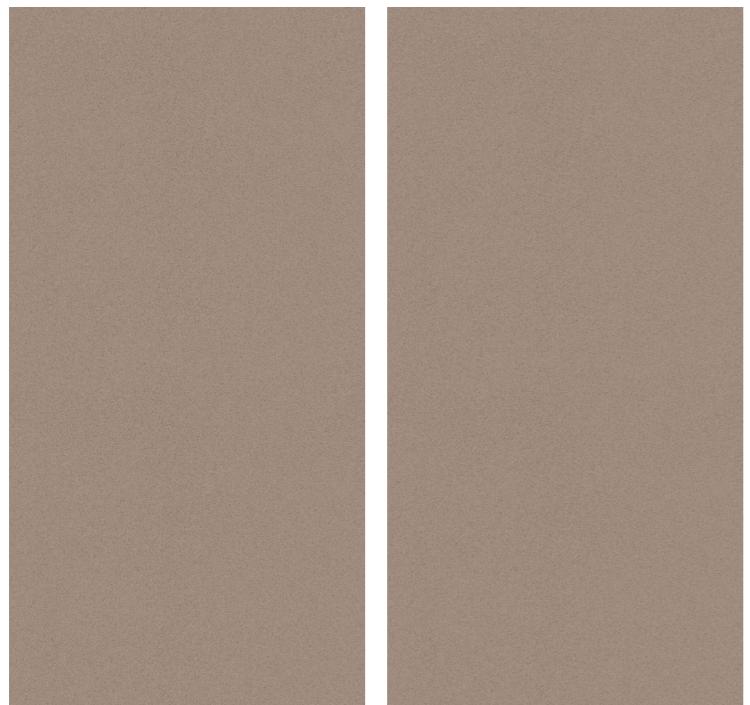

S&P ORANGE(Matt)


Applicable on  
Wall / Floor

Minimum  
4mm Spacer  
Recommended


Available Finish  
Matt



# DUSKY SERIES(600x1200)

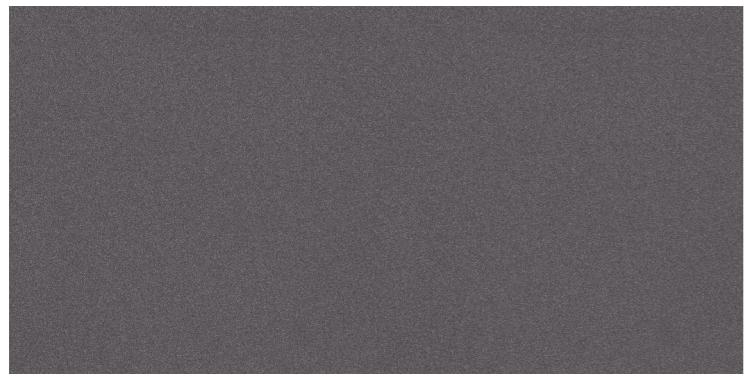

S&P BLACK

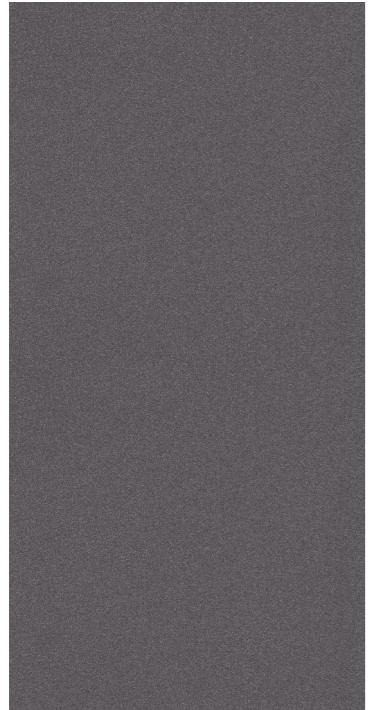

S&P BLACK(Matt)

Applicable on  
Wall / Floor


Available Finish  
Matt




Minimum  
4mm Spacer  
Recommended



# DUSKY SERIES(600x1200)

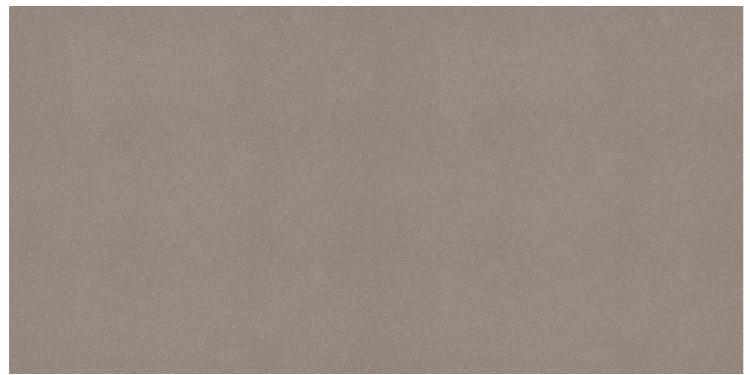

S&P EARTH

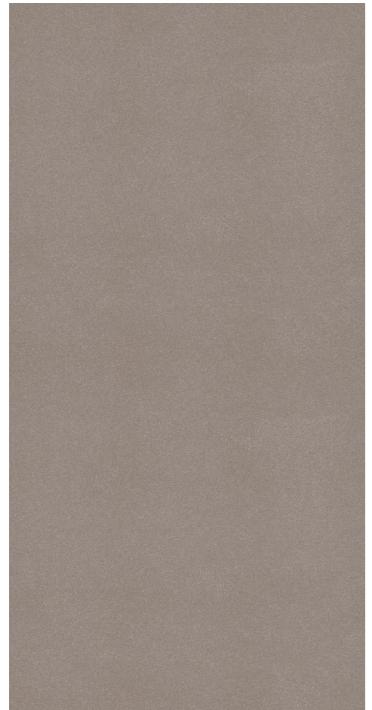

S&P EARTH(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt



Minimum  
4mm Spacer  
Recommended



# DUSKY SERIES(600x1200)



S&P GREY



S&P GREY(Matt)

Applicable on  
Wall / Floor

Available Finish  
Matt



Minimum  
4mm Spacer  
Recommended



# DUSKY SERIES(600x1200)



S&P WHITE



S&P WHITE(Matt)



S&P WHITE(Polished)

Applicable on  
Wall / Floor

Available Finishes  
Polished, Matt



Minimum  
4mm  
Spacer  
Recommended



## TECHNICAL SPECIFICATIONS

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP B1a	MEAN VALUE OF FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	± 0.60%	± 0.10%	ISO-10545-2
Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
Straightness Of Sides	± 0.50%	± 0.10%	ISO-10545-2
Rectangularity	± 0.60%	± 0.10%	ISO-10545-2
Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
Glossiness	Gloss Meter	Min. 90%	Glossometer
Water Absorption	≤ 0.50%	E ≤ 0.05%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm <sup>3</sup>	ISO-10545-6
Mohs Hardness	Min. 6	≤ 6*	EN101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	< 9 x 10 <sup>-6</sup>	< 6 x 10 <sup>-6</sup>	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance (Friction Co-efficient)	> 0.40	> 0.40	ISO-10545-17



## PACKING DETAILS

SIZES	THICKNESS	PIECES / BOX	WEIGHT / BOX (Approx)	COVERAGE AREA / BOX
600x1200mm	8 mm	2 Pieces	27.00 kg	15.5 ft <sup>2</sup> or 1.44 mtr <sup>2</sup>
600x600mm	8 mm	4 Pieces	25.50 kg	15.5 ft <sup>2</sup> or 1.44 mtr <sup>2</sup>
600x600mm	12 mm	3 Pieces	28.00 kg	11.63 ft <sup>2</sup> or 1.00 mtr <sup>2</sup>